

DLXZY28S

Features


- Cámara tipo PTZ Multiformato
- Chip (FH8536(V30)+IMX323)
- 1/2.8"Sony Sensor 2.0M
- Resolución 1080P
- 4X Zoom
- WDR
- IR LED 36
- IR Distancia: 30-50M
- 2.8-12mm lente varifocal
- Resistente al agua: IP66



Specification

Pan & Tilt	
Manual speed	Pan (0.1° ~80°/s) Tilt (0.1° ~80°/s)
Pan Speed	0.5 ~12 /s 0.5 ~12 /s
IR irradiation distance:	30M-50M
Rotation	Pan rotation range 0~ 270°, tilt -5 ~60° Tilt Rotation range -5~60°
Scan	270°programmable, 1 scan
Tour	1 tour, and speed& park time of presets can be set.
Idle run	tour/preset/pattern/scan can be set
Power up run	tour/preset/pattern/scan can be set
CAM SPEC	
sensor	FH8536(V30)+IMX323
Effective Pixels	1920(H)x1080(V)
Signal System	PAL/NTSC
OPTICS	2.8-12mm Sync lens
Min. Illumination	Color : 0.5 lux , BW : 0.1lux
S/N (Y signal)	52dB
White Balance	Auto
ICR	Manual/Auto
DNR	Auto / Off / Low / Middle / High
HLC	Off / On
Max Gain	Auto
IRIS	Auto
FLIP	Vertical , Horizontal ,Vertical-Horizontal,OFF Selectable

Dimension Chart

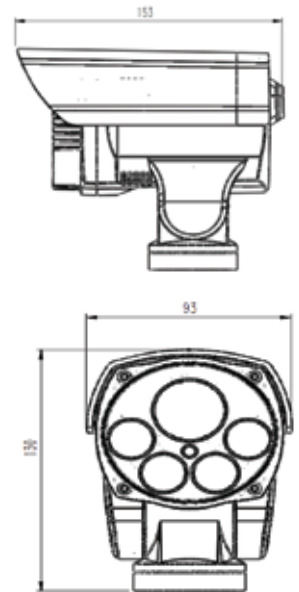

General	
Remote controlling	RS485,UTC
Baud rate (RS485)	2400 / 4800 / 9600/19200 bps
ID range	1-254(software add.)
Output	AHD&TVI&CVI /1080P CVBS/960H
Power consumption	9W/15W(IR_LED ON)
Power supply	DC 12V 1.5A
Temperature	-10 ~ +50
Installation	Wall installation
Net weight	910g
Size	Product size 153mmx93mmx130mm (LxWxH) , Packing size Packing size 255x205x250mm
Protection Level:	IP66 standard (outdoor dome) TVS lightning protection, surge protection and voltage transient protection